

Toshiba Air Conditioning - RAV-RM Data Sheet

RAV-RM561MUT-E Compact 4-Way Cassette

Features




- New elegant flat panel design
- Perfect grid ceiling fitment
- Compact thin chassis
- Individual louvre control
- 5-step air flow control



Technical Data

Model reference			RAV-RM561MUT-E
Nominal	Cooling Capacity	kW	5.0
	Heating Capacity	kW	5.3
	EER/COP	W/W	3.05/3.61
UK	Cooling Total/Sensible	kW	4.80/3.50
	Heating	kW	3.79
Cooling EN14825	Range Min. - Max.	kW	1.5 - 5.6
	Power Input	kW	1.64
	Pdesign	kW	5.0
	SEER/Energy Efficiency Class		5.69/A+
Heating EN14825	Seasonal Energy Consumption	kWh/a	319
	Range Min. - Max.	kW	1.5 - 6.3
	Power Input	kW	1.47
	Pdesign	kW	2.8
	SCOP/Energy Efficiency Class		4.37/A+
Air Flow	Seasonal Energy Consumption	kWh/a	1279
	High - Medium - Low	l/s	222 - 187 - 152
	High - Medium - Low	m³/h	798 - 672 - 546
Sound	Pressure High - Medium - Low	dB(A)	44 - 39 - 35
	Power High - Medium - Low	dB(A)	59 - 54 - 50
Unit	Height x Width x Depth	mm	256 x 575 x 575
	Weight	kg	15
Panel	Height x Width x Depth	mm	12 x 620 x 620
	Weight RBC-UM21PG(W)-E	kg	2.5
Pipe Connection	Flare Connections (gas - liquid)	inch	1/2 - 1/4
	Drain Pipe Connection OD/ID	mm	VP26/20
Remote Controller			RBC-AMT32E
Power Cable	Outdoor to Indoor		3 core + earth

Dimensional Drawings

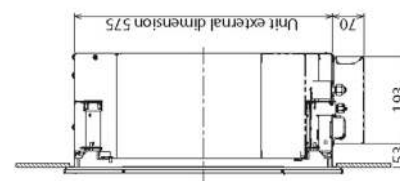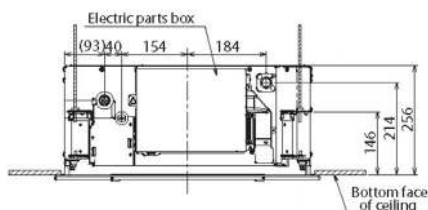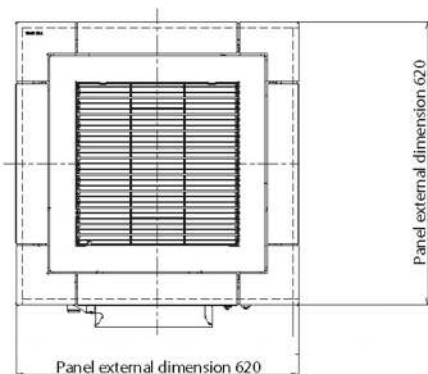

Cool Designs Ltd

Raising the Standards in Air Conditioning Distribution

www.cdlweb.info



All UK duties are based on Cooling Indoor air temperature 22°C DB/16°C WB Outdoor air temperature 28°C DB 50% RH, high fan speed, 5 m pipe run.
Heating Indoor air temperature 20°C DB Outdoor air temperature -5°C DB 100% RH, high fan speed, 5 m pipe run. Values are based on the maximum compressor output.
Data obtained from Toshiba Air Conditioning Published Data July 2018.