



Slim Duct - Standard Series (Horizontal Only)

ARXG09KLLAP / AOYG09KBTB
ARXG12KLLAP / AOYG12KBTB
ARXG14KLLAP / AOYG14KBTB
ARXG18KLLAP / AOYG18KBTB



ARXG09/12/14KLLAP




ARXG18KLLAP



High efficiency and slim design

The slim design allows installations where ceilings are narrow.
Drain hose as standard accessory*



SEER


6.20

(09/18 models)

SCOP

4.30

(09 model)

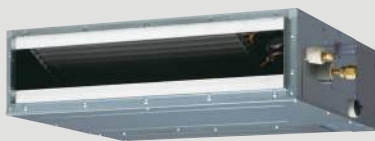

Height
198 mm
Drain pump
built-in

*R32 Model cannot be installed vertically



Selectable with a wide range of static pressure


By using the DC fan motor, it is possible to change the static pressure range from 0 to 90 Pa. The change of static pressure range is possible by remote controller.



Static pressure range
0 to 90 Pa



Low ambient operation

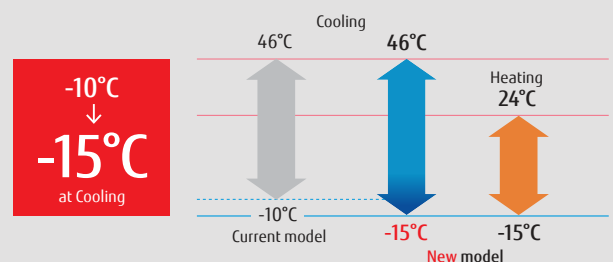

Compact and lightweight outdoor unit

Compact and lightweight outdoor unit expands a wider range of choice for installation location. This makes it easier to use this outdoor unit.

Current model
40 kg



New model
33 kg



Weight
-17.5%

12/14 models



**Model: ARXG09KLLAP / ARXG12KLLAP / ARXG14KLLAP / ARXG18KLLAP
AOYG09KBTB / AOYG12KBTB / AOYG14KBTB / AOYG18KBTB**



ARXG09/12/14KLLAP



ARXG18KLLAP



AOYG09/12/14KBTB



AOYG18KBTB

Optional parts

Wired Remote Controller: UTY-RNRYZ3, UTY-RVNYM,
Simple Remote Controller: UTY-RSRY, UTY-RSNYM


IR Receiver Kit: UTY-LBTYM
Wireless LAN Interface: UTY-TFSXZ1
Remote Sensor Unit: UTY-XSZX

Auto Louver Grille Kit: UTD-GXTA-W (ARXG12/14KLLAP),
UTD-GXTB-W (ARXG18KLLAP)
External Connect Kit: UTY-XWZXZG

Dimensions

Indoor unit :


ARXG09/12/14/18KLLAP

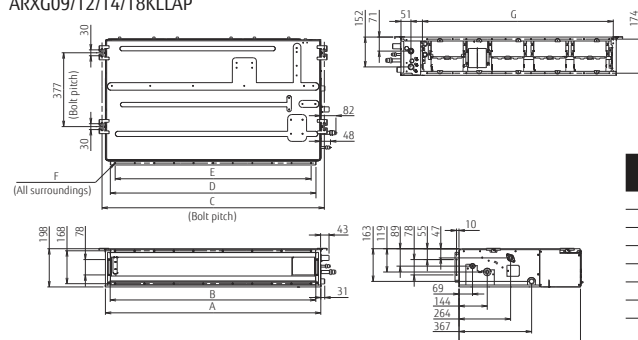

	ARXG09/12/14 KLLAP	ARXG18 KLLAP
A	700	900
B	650	850
C	734	934
D	650	850
E	P100x6~600	P100x8~800
F	18xØ5	22xØ5
G	574	774

Outdoor unit :

AOYG09/12/14KBTB

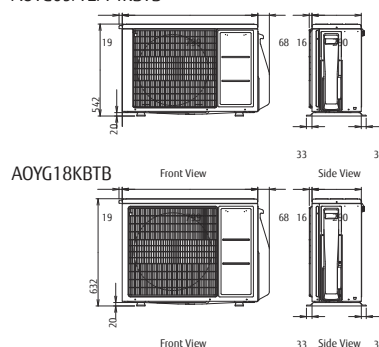

(Unit : mm)

Specifications

Model No.	Indoor unit		ARXG09KLLAP	ARXG12KLLAP	ARXG14KLLAP	ARXG18KLLAP	
	Outdoor unit		AOYG09KBTB	AOYG12KBTB	AOYG14KBTB	AOYG18KBTB	
Power Source			Single-phase, ~230V, 50Hz				
Capacity	Cooling	kW	2.5 (0.9-3.2)	3.5 (0.9-4.4)	4.3 (0.9-5.4)	5.2 (0.9-5.9)	
	Heating		3.2 (0.9-4.7)	4.1 (0.9-5.7)	5.0 (0.9-6.5)	6.0 (0.9-7.5)	
UK Total/sensible cooling			2.37/1.86	3.39/2.54	4.12/3.13	5.01/3.69	
Input Power	Cooling/Heating	kW	0.60/0.79	0.93/1.08	1.28/1.32	1.55/1.62	
EER	Cooling	W/W	4.17	3.76	3.36	3.35	
COP	Heating		4.05	3.80	3.79	3.70	
Pdesign	Cooling/Heating(-10°C)	kW	2.5/2.6	3.5/3.4	4.3/3.8	5.2/4.4	
SEER	Cooling	W/W	6.20	6.10	5.80	6.20	
SCOP	Heating		4.30	4.00	3.90	4.10	
Energy Efficiency Class	Cooling		A++	A++	A+	A++	
	Heating		A+	A+	A	A+	
Annual Energy Consumption	Cooling	kWh/a	141	201	259	293	
	Heating		845	1,189	1,362	1,501	
Moisture Removal		l/h	0.7	1.3	1.5	2.0	
Sound Pressure Level	Indoor (Cooling)	H/M/L/Q	dB(A)	28/27/26/25	29/28/26/25	32/30/28/26	32/30/29/27
	Indoor (Heating)	H/M/L/Q		28/26/25/24	29/28/26/24	32/30/28/25	32/30/29/27
	Outdoor(Cooling/Heating)	High		46/46	47/47	49/49	50/50
Sound Power Level	Indoor(Cooling/Heating)	High	57/57	58/58	60/60	58/58	
	Outdoor(Cooling/Heating)	High	59/59	61/61	62/62	62/62	
Airflow Rate	Indoor / Outdoor (Cooling)	High	m³/h	600/1,480	650/1,580	800/1,670	940/2,160
	Indoor / Outdoor (Heating)	High		600/1,410	650/1,520	800/1,580	940/1,830
Static pressure range (Standard)		Pa	0 to 90 (25)	0 to 90 (25)	0 to 90 (25)	0 to 90 (25)	
Net Dimensions H x W x D	Indoor	mm	198x700x620	198x700x620	198x700x620	198x900x620	
	Outdoor	mm	542x799x290	542x799x290	542x799x290	632x799x290	
Weight	Indoor	kg(lbs)	17 (37)	17 (37)	17 (37)	20 (44)	
	Outdoor	kg(lbs)	32 (71)	33 (73)	33 (73)	36 (79)	
Remote Controller Type (NOT Supplied With Unit)			NO CONTROLLER SUPPLIED WITH THESE UNITS PLEASE ORDER SEPARATELY				
Interconnecting Cable (Suggested cable size 1.5mm)			3 Core + Earth				
Suggested MCB Size		Amp	10	10	16	16	
Max. Operating Current	Cooling/Heating	A	7.9	9.7	10.2	12.1	
Power Supply To			Outdoor				
Connection Pipe Diameter (Gas / Liquid)		Inch	3/8 & 1/4	3/8 & 1/4	3/8 & 1/4	1/2 & 1/4	
Max Pipe Length (Pre-Charge)		m	20 (15)	25 (15)	25 (15)	30 (20)	
Max Height Difference			15	20	20	20	
Operation Range	Cooling	°CDB	-15 to 46	-15 to 46	-15 to 46	-15 to 46	
	Heating		-15 to 24	-15 to 24	-15 to 24	-15 to 24	
Refrigerant	Type		R32	R32	R32	R32	
	Charge	g	850	850	850	1020	
	Additional Charge	g/m	20	20	20	20	

- Specifications and design are subject to change without notice for further improvement.
- Actual products' colours may be different from the colours shown in this printed material.

Distributed by :



ISO 9001
Certified number: 01 100 075229
Fujitsu General (Thailand) Co., Ltd.



ISO 9001
Certified number: 1591702007385M
Fujitsu General Central Air-conditioner (Wuxi) Co., Ltd.

FUJITSU GENERAL AIR CONDITIONING (UK) LTD
Unit 150 Centennial Park, Centennial Avenue, Elstree, Herts. WD6 3SG
www.fujitsu-general.com/uk
Tel: +44 (0)208 731 3450 Fax: +44 (0)208 731 3451

Copyright© 2018 Fujitsu General Limited. All rights reserved. 3EFNP31-1812E