

AOEH09KNCA

| | | |
|---|---------|---------------|
| Nominal Cooling Capacity | (kW) | 2.5 |
| Nominal Heating Capacity | (kW) | 2.8 |
| Height | (mm) | 541 |
| Width | (mm) | 663 |
| Depth | (mm) | 290 |
| Weight | (kg) | 22 |
| Airflow Rate - Cooling - High | (m3/h) | 1430 |
| Airflow Rate - Heating - High | (m3/h) | 1390 |
| Sound Pressure Level - Cooling - High | (dB(A)) | 44 |
| Sound Pressure Level - Heating - High | (dB(A)) | 45 |
| Sound Power Level - Cooling - High | (dB(A)) | 56 |
| Sound Power Level - Heating - High | (dB(A)) | 56 |
| Refrigerant Type (Global Warming Potential) | | R32 (675) |
| Liquid Pipe Size | | 1/4" |
| Gas Pipe Size | | 3/8" |
| Min - Max Pipe Length | (m) | 3-20 |
| Max Height Difference | (m) | 15 |
| Refrigerant Charge | (kg) | 0.57 |
| Refrigerant CO2eq-T | | 0.385 |
| Pre-charged For | (m) | 15 |
| Additional Charge | (g/m) | 20 |
| Unit Power Supply | | 1Ph-230V-50Hz |
| Suggested Fuse Size | (A) | 10 |
| Cooling Mode Minimum Ambient | (°C) | -10 |
| Cooling Mode Maximum Ambient | (°C) | 50 |
| Heating Mode Minimum Ambient | (°C) | -15 |
| Heating Mode Maximum Ambient | (°C) | 24 |



Please visit our webstore for full product and technical documentation

- Specifications and design are subject to change without notice for further improvement.
- Actual products' colours may be different from the colours shown in this printed material.



Document Downloads

[Airflow-Fan Curve](#)
[Capacity Correction](#)

[Charging Details](#)

[Design & Technical Manual](#)

[Dimensional Drawing](#)

[Installation Manual](#)

[Installation Space](#)
[Noise Curve](#)

[Product Image](#)
[Refrigerant Circuit](#)


[Spare Parts List All Pages](#)

[Specifications](#)


[Wiring Diagram](#)

Related Items

[ASEH09KNCA](#)

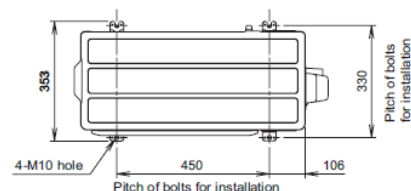

Top view

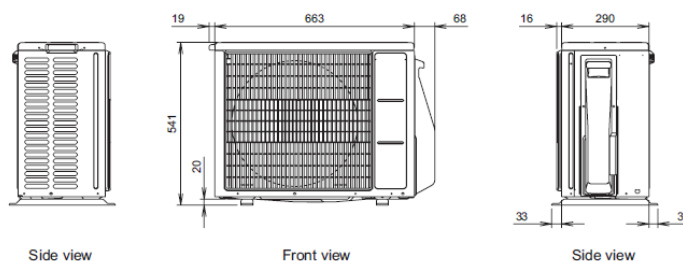

Side view

Front view

Side view

Fujitsu General Air Conditioning (UK) Limited
Unit 150, Centennial Park Elstree, Herts. WD6 3SG
www.fujitsu-general.com/uk
sales@fgac.fujitsu-general.com

Fujitsu Air Conditioning | The name you can rely on