



## SINGLE-SPLIT WALL MOUNTED TYPE

Standard  
Plus  
Series

# SRK-ZTL-W


New!



SRK15ZTL-W, SRK20ZTL-W, SRK25ZTL-W, SRK35ZTL-W, SRK50ZTL-W



BUILT IN  
WIRELESS LAN

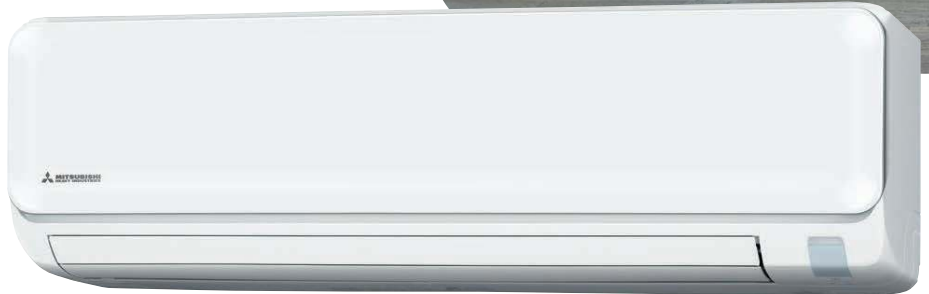

SRK63ZTL-W, SRK71ZTL-W



Wireless  
remote control



SRC15ZTL-W, SRC20ZTL-W,  
SRC25ZTL-W, SRC35ZTL-W



SRC50ZTL-W



SRC63ZTL-W, SRC71ZTL-W

### SPECIFICATIONS

Indoor unit				SRK15ZTL-W	SRK20ZTL-W	SRK25ZTL-W	SRK35ZTL-W
Outdoor unit				SRC15ZTL-W	SRC20ZTL-W	SRC25ZTL-W	SRC35ZTL-W
Power source				1 Phase, 220 - 240V, 50Hz			
Nominal cooling capacity (Min~Max)			kW	1.5 ( 0.7 ~ 2.5 )	2.0 ( 0.7 ~ 2.8 )	2.5 ( 0.8 ~ 3.2 )	3.5 ( 0.8 ~ 3.7 )
Nominal heating capacity (Min~Max)			kW	2.0 ( 0.9 ~ 4.1 )	2.7 ( 0.9 ~ 4.2 )	3.0 ( 1.0 ~ 4.8 )	3.8 ( 1.0 ~ 4.9 )
Power consumption		Cooling/Heating	kW	0.35 / 0.42	0.51 / 0.64	0.58 / 0.66	1.05 / 0.90
EER/COP		Cooling/Heating		4.29 / 4.76	3.92 / 4.22	4.31 / 4.55	3.33 / 4.22
Max. running current			A	9.0	9.0	9.0	9.0
Sound power level	Indoor	Cooling/Heating	dB(A)	51 / 53	52 / 54	55 / 55	56 / 57
	Outdoor	Cooling/Heating		56 / 57	57 / 57	58 / 59	61 / 62
Sound pressure level	Indoor	Cooling (Hi/Me/Lo/Ulo)		36 / 30 / 23 / 19	37 / 31 / 23 / 19	41 / 36 / 26 / 22	42 / 37 / 27 / 22
	Indoor	Heating (Hi/Me/Lo/Ulo)		38 / 32 / 24 / 19	39 / 34 / 25 / 19	41 / 36 / 29 / 22	43 / 37 / 31 / 22
Air flow	Outdoor	Cooling/Heating		43 / 44	45 / 46	47 / 46	50 / 50
	Indoor	Cooling (Hi/Me/Lo/Ulo)	9.5 / 7.5 / 4.9 / 3.8	9.9 / 7.8 / 4.9 / 3.8	10.0 / 8.0 / 5.3 / 4.4	10.4 / 8.5 / 5.4 / 4.4	
	Indoor	Heating (Hi/Me/Lo/Ulo)	10.0 / 8.7 / 5.8 / 4.4	10.4 / 9.1 / 6.2 / 4.4	11.0 / 9.4 / 6.5 / 5.0	11.8 / 9.8 / 6.8 / 5.0	
Exterior dimensions	Indoor	HeightxWidthxDepth	mm	294 x 798 x 210			
	Outdoor			540 x 645 (+57) x 275			
Net weight	Indoor / Outdoor		kg	8.5 / 22.0		9.0 / 24.0	
Refrigerant	Type/GWP			R32 / 675			
	Charge	kg/TCO <sub>2</sub> Eq		0.43 / 0.29		0.59 / 0.40	
Refrigerant piping size		Liquid/Gas	ø mm	6.35 (1/4") / 9.52 (3/8")			
Refrigerant line (one way) length [chargeless length]			m	Max.20 [10]			
Vertical height differences			Outdoor is higher/lower	Max.15 / Max.15			
Outdoor operating temperature range	Cooling	°CDB		-15~46			
	Heating			-15~24			
Clean filter				Allergen Clear Filter x 1, Photocatalytic Washable Deodorising Filter x 1(option)			

\* The data are measured under the following conditions(ISO-T1, H1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.

\* Sound level indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.

\* 'tonne(s) of CO<sub>2</sub> equivalent' means a quantity of greenhouse gases- expressed as the product of the weight of the greenhouse gases in metric tonnes and of their global warming potential.



## Elegant timeless design

- Simple yet an elegant, designed by an Italian designing company.
- When the unit is mounted the intake will be partially hidden.
- Small in size (compared to ZR•ZS series)



## New remote control

- Simple design and easy to use
- Temperature controlled in 0.5°C units
- Easy to see with backlight



### KEY FEATURES

- Elegant timeless design with compact sizing.
- Small capacity down to 1.5 kW to perfectly fit any small or well insulated rooms
- Wireless Control System is included.
- New remote control with simple design.
- 2 levels of silent modes are available to further reduce the outdoor unit noise level.
- The longest pipe length and highest differential height
- Lightweight outdoor unit offers great installation flexibility.

	SRK50ZTL-W	SRK63ZTL-W	SRK71ZTL-W
	SRC50ZTL-W	SRC63ZTL-W	SRC71ZTL-W
	1 Phase, 220 - 240V, 50Hz		
	5.0 ( 1.3 ~ 5.3 )	6.3 ( 1.2 ~ 7.1 )	7.1 (1.2~7.3)
	5.8 ( 1.3 ~ 6.3 )	7.1 ( 1.0 ~ 8.5 )	8.0 (1.1~9.1)
	1.59 / 1.62	1.84 / 2.01	2.45 / 2.37
	3.14 / 3.58	3.42 / 3.53	2.90 / 3.38
	14.5	17.0	17.0
	60 / 60	60 / 61	61 / 62
	64 / 65	64 / 66	66 / 66
	47 / 40 / 32 / 25	46 / 43 / 38 / 30	48 / 44 / 39 / 31
	47 / 40 / 33 / 25	47 / 43 / 39 / 32	47 / 44 / 40 / 33
	52 / 53	52 / 54	53 / 54
	12.5 / 10.4 / 7.2 / 5.4	17.0 / 14.7 / 12.1 / 9.4	17.5 / 15.2 / 12.6 / 9.4
	12.6 / 11.5 / 8.9 / 6.4	18.4 / 17.2 / 14.1 / 11.6	18.9 / 17.7 / 14.6 / 11.6
	35.6 / 33.8	43.0 / 40.9	43.0 / 40.9
	294 x 798 x 210	294 x 998 x 230	
	595 x 780(+62) x 290	640 x 800 (+71) x 290	
	9.5 / 33.0	12.0 / 42.5	
	R32 / 675		
	0.9 / 0.61	1.20 / 0.81	
	6.35 (1/4") / 12.7 (1/2")	6.35 (1/4") / 12.7 (1/2")	
	Max.25 [15]	Max.30 [15]	
	Max.20 / Max.20	Max.20 / Max.20	
	-15~46		
	-15~24		
	Allergen Clear Filter x 1, Photocatalytic Washable Deodorising Filter x 1(option)		